

# RESIDENTIAL PLAQUE ORDER FORM

**BILL TO:**  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**SHIP TO:**  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Contact Name:** \_\_\_\_\_

**Phone:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Account Number:** \_\_\_\_\_

**Email Address:** \_\_\_\_\_

**SELECT ONE METAL PLAQUE SHAPE & SIZE:**

**SELECT OPTIONS:**

**CONTOUR - \$275**  
24" x 14"



**CAST ALUMINUM FINISH**

BRONZE TONE FINISH  
 ALUMINUM FINISH

**CUSTOM CONTOUR - \$200**  
16" x 10" (Shown in Aluminum Finish)



**ARCH - \$200**  
15" x 9½"




**BORDER STYLE**

SINGLE LINE BORDER  
 ROPE BORDER

**LETTERSTYLE**

Title Case  
 ALL CAPS

**SLIM SERPENTINE - \$180**  
16" x 7"



\*Numerical height is less than 3" when two lines are used

**SINGLE LINE SERPENTINE - \$165**  
12" x 6" (Shown with Rope Border)



Line 1 Only

**MOUNTING METHOD**

WALL MOUNT STUDS  
 GARDEN STAKE MOUNT - \$110

**PROOFING**

IMMEDIATE PRODUCTION (118282)  
 PROOF FOR APPROVAL (119074)

NOTE: All residential plaques are cast aluminum and come standard with Dark Oxide Bronze background, Leatherette texture, and Cheltenham font.

**ADDRESS PLAQUE TEXT:** Line 1: 

--	--	--	--	--

Line 2: 


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

## WALL MOUNTING INSTRUCTIONS



Four holes are drilled and tapped in the back of the metal plaque to accommodate threaded studs.

- Recommended Uses:**
- Solid Walls
  - Flat rocks
  - Brick walls
  - Stone walls
  - Masonry surfaces, including stone benches

1. Create a paper template outline of the reverse side of the plaque, marking on the paper where the holes are on the plaque.


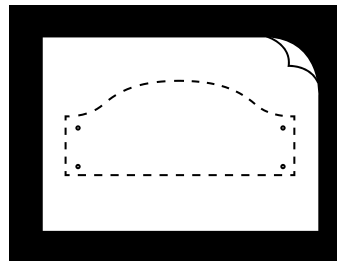


2. Measure, level and mark where you want the drill holes (**drill holes slightly larger than dia. of threads**) on the surface of the wall.

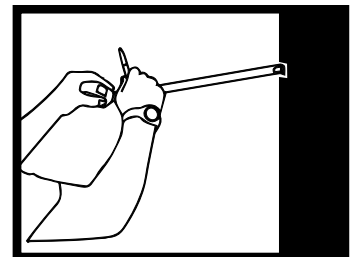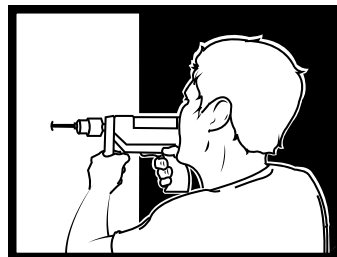

3. Hand-tighten the four threaded studs into the plaque.

Then, fill the drilled holes with industrial-grade epoxy or quick-set cement.

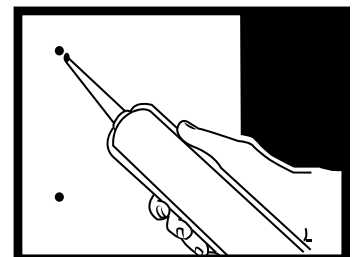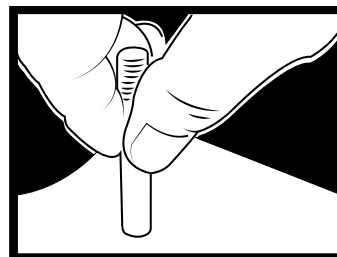

Lastly, place the plaque with attached studs into the holes. Let the epoxy set according to manufacturer's directions.

